


Data Sheet HeatMoni Spot, monitoring heat in pipes

- ❖ Measuring temperature on heat pipes, refrigerators, freezers, etc.
- ❖ Monitor central heating systems.
- ❖ Work on all different pipe materials.
- ❖ Slim; can be installed on limited space.
- ❖ Wireless sensor, transmitting measuring data to the ReMoni cloud solution, ReCalc.

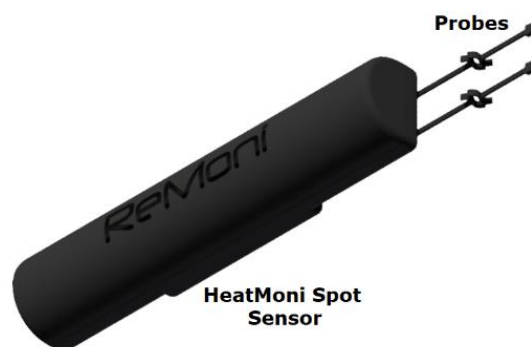

APPLICATION

HeatMoni Spot is a flow sensor, measuring if there is flow in a pipe.

HeatMoni Spot is fast and easy installed on different types of pipes and dimensions. This can be e.g. pipes with cold or hot water, or heating pipes. The probes are simply fastened to the pipe which is to be measured and the sensor is fastened somewhere near to the pipe. It is possible to extend the probe wires if the sensing end of the probes are reattached.

HeatMoni Spot is a wireless sensor, transmitting measured data to the ReMoni gateway and therefrom to ReCalc.



INSTALLATION

Please see the installation manual at:
<http://remoni.com/products/sensors/heatmoni/>

WIRELESS DATA TRANSMISSION

Please see the data sheet for wireless communication at:
<https://remoni.com/products/data-chain/wireless-communication/>

HARDWARE AND SOFTWARE TESTS

All ReMoni products are tested individually before shipping from factory.


SOFTWARE CONFIGURATION

All configurations are made over the ReMoni portal, ReCalc:
<https://recalc.remoni.com>

TECHNICAL DATA

<p>Technical data, HeatMoni Spot</p> 	Mounting and measuring:	
	Mounting:	Mounted somewhere near the pipes, using the prepared mounting possibilities on the bottom of the sensor.
	Mounting of probes	The probes are taped to the pipes using aluminium tape.
	Pipe materials:	Metal (e.g. stainless steel, galvanized steel, copper, copper alloy, cast iron). Plastic (e.g. PVC, PE, PEX, PP, ALUPEX).
	Pipe dimensions:	All pipe dimensions.
	Measuring method:	Temperature difference, between the measured pipes and surrounding temperature, combined with math.
	Measuring value:	Temperature in pipes, refrigerators, freezers etc. and indication of flow in pipes.
	Precision	± 0.5°C between 0°C and 40°C ± 1.0°C between - 40°C and 80°C
	Battery type:	1 x 3.6 V 2.5 Ah AA Li-Me battery.
	Battery lifetime:	> 5 years. Designed for battery lifetime > 15 years
	Sampling rate:	Every second (1 Hz) and up Can be adjusted from ReCalc.
	Outline data:	
	Surrounding temperature:	-20°C to 70°C.
	Transport temperature:	-40°C to 80°C.
	Encapsulation material:	PC, polycarbonate.
	Protection class:	IP64.
	Colour:	RAL 9005 (black).
	Weight:	81 g.
	Application area:	Indoor and outdoor. When mounted outdoors all penetrating cables and wires shall be turned downwards.
	Product conformity:	CE. RED (2014/53/EU). LVD (2014/35/EU). RoHS directive 2011/65/EU.
Standards:	RED: EN 300 220-2 V3.1.1:2017-02 Or EN 300 220-2 V3.2.0 (2017-09) LVD: EN 62311:2008	

DIMENSIONS

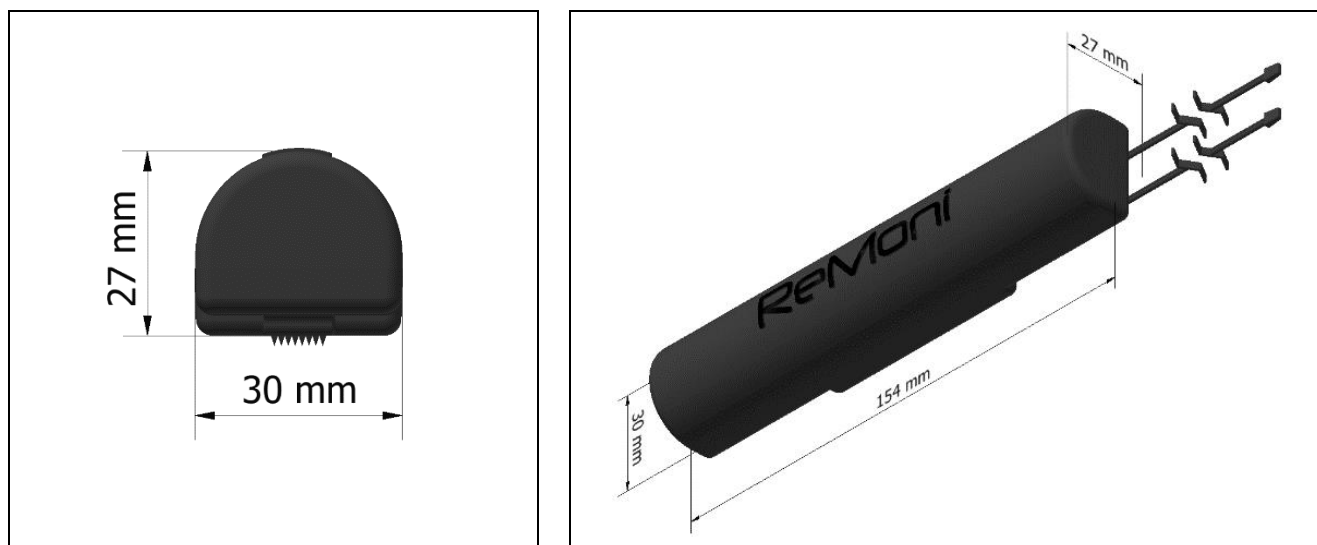

ORDERING NUMBERS

See <https://remoni.com/buy/list-prices/>

ANNEX

Instructions for disposal of WEEE by users of the European union



This product must not be disposed of with other waste. Instead, it's the user's responsibility to dispose of their waste equipment by handing it over to a designated collections point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensures that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local office, your house-hold waste disposal or where you purchased your product.



The product contains lithium battery/s.
Must recycle or dispose of properly.

CONTACT

ReMoni ApS

Sudkærvej 9
DK - 8752 Østbirk.

M: info@remoni.dk

T: +45 3064 1627