

## UNii I/O module (excl. PSU)



### FEATURES AND BENEFITS

- + Quick and easy installation
- + 8 inputs standard, expandable to 16 zones
- + 4-open collector (OC) outputs 200 mA
- + Delivered in a small metal housing without power supply
- + Built-in buzzer for location determination
- + Grade 2 certified

With the UNii I/O (excl. PSU) module for the UNii alarm system it is possible to expand the system with extra hardwired zones. The UNii I/O module is also available in a version including power supply also with the option to expand outputs.

### Characteristics

The UNii I/O module (excl. PSU) in a compact metal cabinet does not include power and must be powered via the RS-485 bus. This module has eight hardwired zones and two outputs (two open collector outputs, max. 200 mA).


The UNii I/O module (excl. PSU) can be expanded with an 8-input expansion board (max. 1) to be able to connect a total of 16 zones in the cabinet. The UNii I/O module (excl. PSU) cannot be expanded with extra outputs.

## Specifications

Supply voltage:	via RS-485 bus
Current drain:	60 mA
Inputs:	8
Outputs:	4 (open collector 200mA)
I/O Module:	Max 15 pcs
Operating temperature:	0 ° to +50 ° C
Dimensions:	260 x 215 x 85 mm (LxWxH)
Color:	White
Weight:	2090 g
Certification:	EN50131 approved (Grade 2)

## Order Information

ART.NR.	DESCRIPTION
004600	UNii control panel 32 inputs
004602	UNii control panel 128 inputs
004604	UNii control panel 512 inputs
004662	UNii I/O module (excl. PSU) in cabinet
004664	UNii 8 inputs expansion board

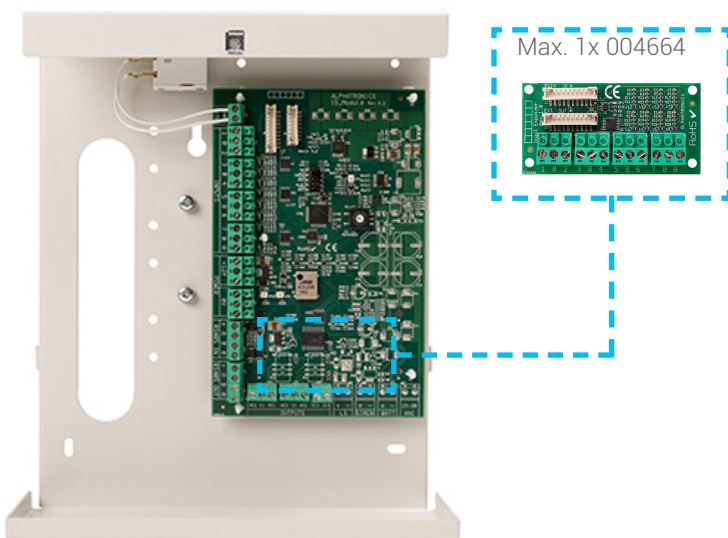

Boekdrukker 5-7  
 3861 SE Nijkerk  
 The Netherlands  
 Tel.: +31 (0)33-2459944  
 Web: [www.alphatronics.nl](http://www.alphatronics.nl)  
 Email: [info@alphatronics.nl](mailto:info@alphatronics.nl)